


# Venezuela Price Quote Single-fiber Bidirectional QSFP-DD

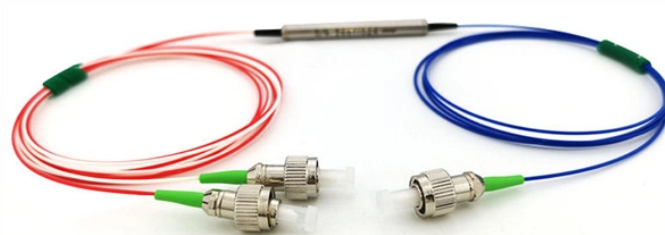

## Overview

Simple to deploy, this compact adaptor doubles fiber capacity while avoiding costly new fiber/transceiver deployments and frees up fiber for other services 50% fiber savings with quick ROI Any bit rate up to:

1G/10G/40G/100G/200G/400G and suitable for 2 wavelengths

1300nm/1550nm Simple to deploy, this compact adaptor doubles fiber capacity while avoiding costly new fiber/transceiver deployments and frees up fiber for other services 50% fiber savings with quick ROI Any bit rate up to:

1G/10G/40G/100G/200G/400G and suitable for 2 wavelengths

1300nm/1550nm No reviews yet Certificates: CE. Range Transceiver form

factor: QSFP28; Data Rate: 100G; Wavelength: Tx 1304nm/Rx 1309nm; Tx 1304nm/Rx 1309nm; Distance: 40km; Transmit power (dBm): 1. 1; Maximum

receiver sensitivity (dBm): -16. 2; Fiber Type: Single-mode Simplex Fiber; Temp.

YXFiber offers an all-rounded optical fiber structured cabling solutions with our extensive experience to fulfill the needs in Telecom and FTTx Networks. Build trusted, proactive networks for federal, state, and local institutions. Enable.

For additional information on SFP Transceivers, see 10G/8G SFP Transceivers, CWDM SFP Transceivers, or DWDM SFP Transceivers. Data Rate: It carries a 40

Gbps connection divided over two 20 Gbps channels, each on a separate. UF-BQSP-100G23-80/UF-BQSP-100G32-80 is designed for 100G 80km single fiber optical communication applications. This module contains 4-lane optical transmitter, 4-lane optical receiver and module management block including 2 wire serial inter-face. The optical signals are multiplexed to a.


## Venezuela Price Quote Single-fiber Bidirectional QSFP-DD



RAD offers dual to single fiber solutions for high-speed, reliable networks. Explore our Bidi QSFP28 adaptors for seamless connectivity.



1U 19" Pre-loaded LC fibre patch panel (48 fibres, OS2 singlemode) provides efficient and easy management of fibre optic cables in the rack or cabinet.



This bidirectional unit must be used with another transceiver or network appliance of complimentary wavelengths. Digital diagnostics functions are also available via the I2C interface, as specified by the ...



SFP (Small Form Factor Pluggable) is a compact, hot-swappable transceiver module that converts electrical signals into optical signals (and vice versa), enabling long-distance communication ...




The QSFP-40G-SR-BD 02311FPA represents a model of 40 Gbps Quad Small Form-Factor Pluggable (QSFP) transceiver modules specifically designed for short-range data communication and ...



1U 19" Pre-loaded LC fibre patch panel (48 fibres, OS2 singlemode) provides ...



Distance: 40km Transmit power (dBm): 1.5 to 7.1  
 Maximum receiver sensitivity (dBm): -16.2 Fiber Type: Single-mode Simplex Fiber




The Vchung 200G QSFP-DD LR4 is a pluggable optical transceiver module designed for next-generation data center optical interconnects, and supports 200GBASE-LR4 Ethernet links reach up ...



Single Fiber Bidirectional SFP transceivers use simplex single-mode fiber to double the bandwidth, data rates up to 4G and distances up to 160km.



200G/400G/800G optical module features up to 40km transmission distances using QSFP56/QSFP-DD footprints for data center interconnect applications - FiberMall



200G QSFP-DD optical transceivers is available at Lightrend. The series of products comply with IEEE 802.3bs and QSFP-DD MSA standards and are mainly applied in 200G Ethernet, Data Center and ...

## Contact Us

For more information, pricing, or custom data center solutions, please contact us:

Website: <https://www.yoahorroenergia.es>

Email: [hello@yoahorroenergia.es](mailto:hello@yoahorroenergia.es)

Phone: +233 54 318 7269

Address: Plot 28, Spintex Road, Accra, Greater Accra, Ghana

This document is for informational purposes only. Specifications subject to change without notice.

